

IPC4-ARM-WALL


Typ der Wandhalterung

| Produktcode | Tragfähigkeit | Minimale und maximale Länge | Höhenmeter | Offen | Horizontale Drehung |
|--------------------|---------------|-----------------------------|------------|-----------|---------------------|
| IPC4-ARM-WALL-F120 | 2-7kg | 85-285 mm | 130 mm | +50°/-35° | 360° |
| IPC4-ARM-WALL-F150 | 2-7kg | 85-385 mm | 130 mm | +50°/-35° | 360° |
| IPC4-ARM-WALL-M150 | 3-12kg | 100-395mm | 155 mm | +50°/-35° | 360° |
| IPC4-ARM-WALL-F425 | 3-12kg | 95-380mm | 250 mm | +85°/-30° | 360° |


IPC4-ARM-WALL-F120




F120

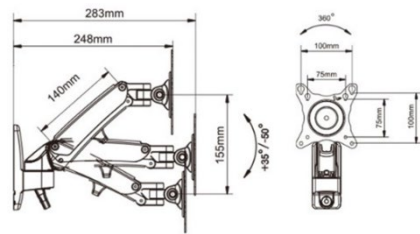


IPC4-ARM-WALL-F150

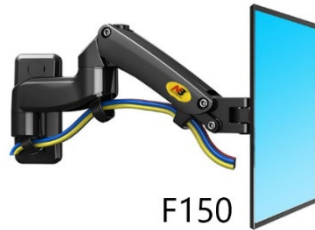


F150

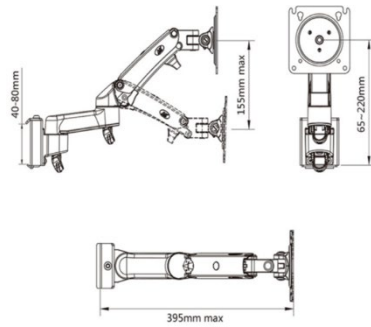


IPC4-ARM-WALL-M150

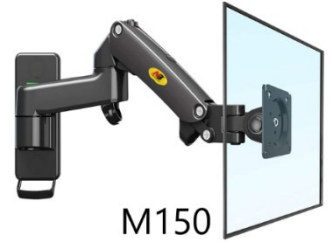


M150

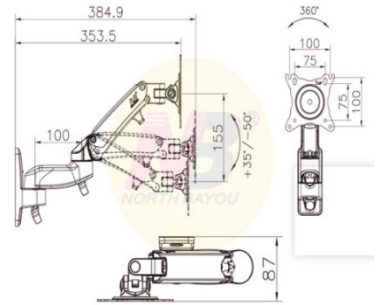

IPC4-ARM-WALL-F300

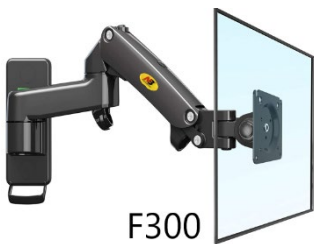



F300

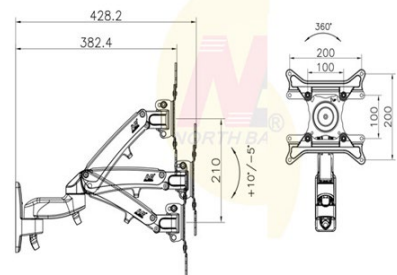

IPC4-ARM-WALL-F425



F425

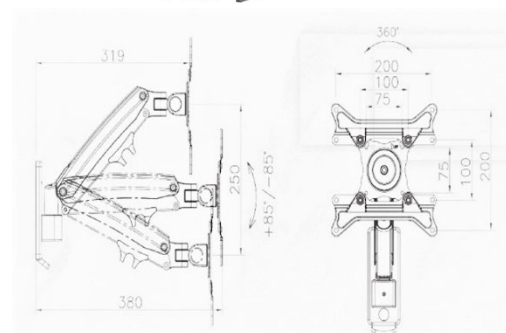

IPC4-ARM-DESK

Desktop-Transportgerät



Full Time Efficiency Thanks To its Special Design For Industrial Environment



Fanless

Fanless Design With Aluminium Chassis



True Flat IP65 Protection Class Front Bezel



Robustness At High and Low Temperature Environment



Auto-Restart After Re-Energised



Low Energy Consumption



Vibration Protection



Shock Proof Protection



EMC Compatibility



3 YEARS WARRANTY